

NFINITY 1




INFINITY SERIES MODEL # AI1INF6666

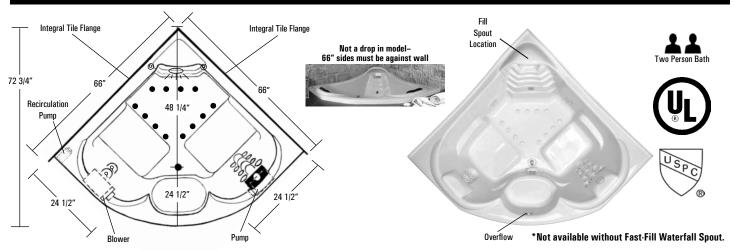

No alternate pump location available.

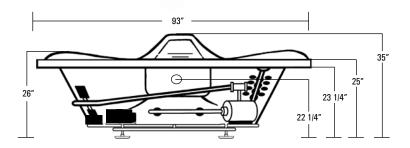

Rough-In Plumbing Measurements



SPECIFICATIONS:

GENERAL SPECIFICATIONS:

Tub Size 66" x 66" x 35" 168 cm x 168 cm x 89 cm **Bathing Well** Lounge 1: 40" long

Lounge 1: 21" wide Lounge 2: 45" long Lounge 2: 21" wide

23" interior depth

Shipping Weight 649 lbs. / 294 kg **Tub Weight Filled** 1196 lbs. / 543 kg Weight w/Equipment 241 lbs. / 109 kg Gallons to Overflow 115 gal. / 435 L

1 bather: 96 gal. / 363 L Gallons to Operate

2 bathers: 81 gal. / 306 L

ELECTRICAL SPECIFICATIONS:

Pump 2 HP: 12 AMP: 110V 1.5 kW: 12.5 AMP: 110V Inline Heater

Requirement 1-15 AMP 2 pole, separate circuit

required protected with Class A GFCI

1 HP: 10.5 AMP: 110V

Requirement 1-15 AMP 1 pole, separate circuit

required protected with Class A GFCI

This whirlpool will need to be hard wired to the breaker box. Three outlets will be supplied on the whirlpool.

This unit is not recommended for shower installations.

This unit has a 3/4" female waterfall fill spout connection.

Fax-On-Demand Document # 1118



STANDARD EQUIPMENT:

16 Hydrotherapy Jets including:

- 12 Shiatsu Back Jets
- 2 Recessed Rotary Massage Jets
- 2 Full Size Pressure-Flo Hydrotherapy Jets

Air Bath System:

- 1 HP Variable Speed Air Blower with 20-Minute Timer
- Electronic Control Panel
- Automatic Purge and Dry Cycle
- 600 Watt Air Heating System

Aquatic Quality Features:

- 2 HP Run-Dry Pump
- 1.5 kW Inline Maintenance Heater
- "Quiet Pad" Anti-Vibration Pump Mount for Quiet Pump Operation
- Shiatsu Electronic Control Panel with Preprogrammed Jet Sequencer
- Bath-Side Electronic Control Panel with Temperature Display
- Integral Tile Flange
- Pulsating Neck Jet Pillow and Sculptured Foam Pillow
- 2 Reclining Lounge Seats and 2 Arm Rests
- Continuous Waterfall with Recirculation Pump
- Integrally Molded Fast-Fill Waterfall Spout (valves not included)
- Chromatherapy
- Slip Resistant Floor
- Adjusta-Level Base
- Heat-bent Rigid PVC Piping for Optimum Sanitary Conditions
- Durable, Easy to Clean, Lucite[®] Cast Acrylic Surface
- Available in 8 Standard No-Charge Colors

UL & IAPMO Listed, Factory Tested

Limited Lifetime Warranty

OPTIONAL EQUIPMENT:

- - Chrome, Polished Brass, Gold, Polished Nickel or Satin Nickel
- · Lift & Turn Waste and Overflow
- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel or Oil Rubbed Bronze
- · Cable Drive Waste and Overflow
- Chrome, Polished Brass, Gold, Polished Nickel, Satin Nickel, Oil Rubbed Bronze or Color Matched (Bone, White and Biscuit Only)
- · Hand Held Jet · Chrome or Polished Brass
- · Premium Colors

All acrylic colors featured by Aquatic match the industry's leading fixture manufacturers.

The manufacturer accepts a 1/4" variance. There are variations on each tub and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building should be measured from the tub; Aquatic Industries, Inc. assumes no responsibility for preparatory work. www.aquaticwhirlpools.com 800.555.5324

Blower